

Optimal design of circular plates with internal supports

JAAN LELLEP
University of Tartu
Institute of Mathematics
J. Liivi Street 2, 50409 Tartu
ESTONIA
jaan.ellep@ut.ee

JULIA POLIKARPUS
University of Tartu
Institute of Mathematics
J. Liivi Street 2, 50409 Tartu
ESTONIA
julia.polikarpus@ut.ee

Abstract: The behaviour of circular plates with internal rigid ring supports is investigated. The material of plates is assumed to be an ideal elastic material obeying the Hooke's law. The case of an elastic circular plate supported at the edge and resting on an absolutely rigid ring support is studied in a greater detail. Various optimization problems with unknown positions of extra supports are discussed and the problem of optimal location of the internal support is solved under the condition that the cost of the support is proportional to its length. Making use of the variational methods of the optimal control theory necessary conditions of optimality are deduced analytically. Numerical results are presented for the case of uniformly distributed transverse pressure.

Key-Words: plate, internal support, optimization, optimal control

1 Introduction

The reduction of the compliance of thin walled structures like beams, plates and shells is often the primary concern in the engineering mechanics. The need for reduction of the compliance and the increase of the structural stiffness is related to the use of light-weight structures which are less material consuming than the traditional structures. One of the ways of increasing the stiffness of beams, plates and shells is to furnish these structural elements with additional supports. Evidently, it is reasonable to settle these supports at the optimal positions.

The problem of minimization of the compliance of elastic beams and the determination of the optimal location of the additional support was first formulated by Mroz and Rozvany [22]. In the paper [22] designs of minimum compliance of beams are established in the case of quasistatic loading. Later Szelaĝ and Mroz [27], Akesson and Olhoff [1] treated the problems of maximal eigenfrequency for given stiffness with respect to the location of the additional support. Bojczuk and Mroz [3] developed a new method for simultaneous optimization of topology, configuration and cross-sectional dimensions of elastic beams and beam structures extending earlier results by Garstecki and Mroz [6], Mroz and Lekszycki [21], also by Lepik [20]. In the subsequent papers by Bojczuk and Mroz [4] this concept was applied for optimal design of active supports with force actuators. Olhoff and Akesson [23] treated the stability of columns and Wang et al [31] studied the buckling of axisymmetric

plates.

A lot of attention has been paid in the literature to the optimization of internal supports to beam, plate and shell structures in the case of inelastic materials. Probably the first paper in this area is due to Prager and Rozvany [24]. Systematic reviews of results obtained in earlier papers are presented by Rozvany [26], also by Lellep and Lepik [12]. Optimal designs of circular cylindrical shells with additional supports are established by Lellep [8, 11] in the case of dynamic loading and an ideal plastic material. The behaviour of geometrically non-linear cylindrical shells with internal supports is studied in [9, 10, 11, 13].

Optimal designs of axisymmetric plates and shells of various shape made of elastic and inelastic materials are established in [16, 17, 18, 19]. Inelastic spherical and conical shells are studied in [17, 18, 19] whereas a stress strain analysis of an annular plate made of an elastic plastic material is presented in [15].

A design sensitivity analysis for the deflection of beam or plate structures was undertaken by Wang [31] in the case of simple supports located at given mesh nodes. Stiffened sector plates are studied in [28].

In the present paper an analytical method of determination of positions of rigid ring supports for circular plates is developed. The analysis is confined to the axisymmetric response of elastic plates to subjected loads.

2 Formulation of the problem

Let us consider axisymmetric deformations of a circular plate subjected to the axisymmetric transverse loading of intensity $P = P(r)$ (Fig. 1). Here r is the current radius e. g. the distance from the center of the plate. As we are studying the axisymmetric response of the plate all points lying at the circle with radius r have common displacements $W(r)$ in the transverse direction as well as common deformations and curvatures κ_1, κ_2 in the radial and circumferential directions, respectively. Note that the radial displacement, also radial and circumferential membrane forces will be neglected in the present study whereas classical equations of the bending theory of thin plates will be used.

The plate under consideration is simply supported at the edge and it is resting on an absolutely rigid ring support of unknown radius $r = s$. From practical considerations it is evident that the desirable position of the additional support is such that the maximal deflection of the plate is as small as possible. Thus the optimal location of the internal support should minimize the functional

$$I_1 = \max_{r \in [0, R]} W(r, P, s) \quad (1)$$

for given loading $P = P(r)$ and thickness $h = h(r)$. However, the cost function presented in the form (1) has several drawbacks. First of all, it is a non-differentiable and non-additive functional. The use of non-differentiable functionals in the solution of problems of optimization is quite complicated. On the other hand, the functional (1) ignores the expenditures necessary for manufacturing of the additional support.

It can be shown that an approximation of the functional (1) can be presented as [2, 12]

$$I_2 = \left(\int_0^R W^k r dr \right)^{\frac{1}{k}} \quad (2)$$

where k is an integer. If $k \rightarrow \infty$ then $I_2 \rightarrow \|W\|$.

Due to the circumstances mentioned above in the present paper the cost function

$$J = \int_0^R W^k r dr + \mu_0 2\pi s \quad (3)$$

will be employed. In (3) μ_0 stands for the specific cost (cost per unique length) of the additional support. We assume herein that the material cost of the additional support is proportional to its length.

The aim of the paper is to determine the design of the plate with an additional support which minimizes the cost function (3) so that at each value of P governing equations of the theory of thin axisymmetric plates with appropriate boundary conditions are satisfied.

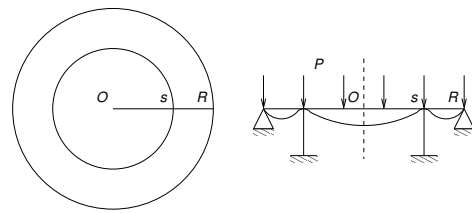


Figure 1: Circular plate with additional support.

3 Equilibrium equations

The linear theory of thin plates with small strains and small deflections will be employed (see Reddy [25], Vinson [30]). According to this approach one can treat the equilibrium of internal and external forces and couples on the basis of an undeformed element of the plate. Let M_1, M_2 be the generalized couples called bending moments in the radial and circumferential directions, respectively. Bending moments M_1, M_2 are the only generalized stress components contributing to the internal energy. Note that the membrane forces are assumed to be small so that one can neglect the membrane action of internal forces. Although the shear force Q may be finite it does not contribute to the internal energy in the classical plate theory. The reason is that the corresponding strain component vanishes.

In the frameworks of the classical plate theory couples M_1, M_2 with forces Q and P form a system of forces and moments which keep the element of the plate in equilibrium. The equilibrium conditions of a plate element can be written as (see Vinson [30])

$$\frac{d}{dr}(rM_1) - M_2 - rQ = 0, \quad \frac{d}{dr}(rQ) + P(r)r = 0. \quad (4)$$

4 Constitutive equations

It is assumed that the material of the plate is an ideal elastic material obeying the Hooke's law. In its original form Hooke's law holds good for principal stresses as

$$\sigma_1 = \frac{E}{1 - \nu^2}(\epsilon_1 + \nu\epsilon_2), \quad \sigma_2 = \frac{E}{1 - \nu^2}(\epsilon_2 + \nu\epsilon_1) \quad (5)$$

where E and ν are the moduli of elasticity and ϵ_1, ϵ_2 stand for corresponding strain components. In the case of pure bending

$$\epsilon_1 = z\kappa_1, \quad \epsilon_2 = z\kappa_2 \quad (6)$$

where z is the distance between a current point and the middle surface of the plate. Principal curvatures κ_1, κ_2 can be expressed as

$$\kappa_1 = -\frac{d^2W}{dr^2}, \quad \kappa_2 = -\frac{1}{r} \frac{dW}{dr}. \quad (7)$$

Substituting strain components (6) in (5) and integrating over the plate thickness yields the generalized Hooke's law

$$M_1 = D(\kappa_1 + \nu\kappa_2), M_2 = D(\kappa_2 + \nu\kappa_1) \quad (8)$$

where the flexural stiffness

$$D = \frac{Eh^3}{12(1 - \nu^2)}. \quad (9)$$

Taking a look at the equilibrium and constitutive equations (4) – (9) it appears that one can eliminate from the set of basic equations variables $\sigma_1, \varepsilon_1, \sigma_2, \varepsilon_2, \kappa_1, \kappa_2$ and also M_2 . Introducing another new variable Z one can present the system of governing equations as

$$\begin{aligned} \frac{dW}{dr} &= Z, \\ \frac{dZ}{dr} &= -\frac{M_1}{D} - \frac{\nu Z}{r}, \\ \frac{dM_1}{dr} &= \frac{D(\nu^2 - 1)Z}{r^2} - \frac{M_1(1 - \nu)}{r} + Q, \\ \frac{dQ}{dr} &= -\frac{Q}{r} - P(r). \end{aligned} \quad (10)$$

Variables W, Z, M_1, Q will be treated as state variables which satisfy the state equations (10) with appropriate boundary and intermediate conditions. At the outer edge of the plate, e. g. at $r = R$ bending moment M_1 and the deflection W must vanish. Thus

$$M_1(R) = 0, \quad W(R) = 0. \quad (11)$$

Due to the symmetry at the center of the plate

$$\frac{dW}{dr}(0) = 0, \quad Q(0) = 0. \quad (12)$$

At $r = s$ where the rigid ring support is located must be

$$W(s) = 0. \quad (13)$$

Note that state variables W, Z, M_1 are continuous whereas Q can be discontinuous at $r = s$.

5 Necessary optimality conditions

Evidently, the posed problem can be considered as a particular problem of the optimal control. It consists in the minimization of the cost function (3) among the trajectories of the system (10) with boundary conditions (11) – (13). In order to establish the requirements to be satisfied by the optimal solution let us

introduce the augmented functional (see Bryson [5], Hall [7]; Lellep, Polikarpus [14, 16])

$$J_* = \mu s + \int_0^s F_* dr + \int_s^R F_* dr \quad (14)$$

where according to (3), (10)

$$\begin{aligned} F_* &= W^k + \psi_1 \left(\frac{dW}{dr} - Z \right) + \\ &+ \psi_2 \left(\frac{dZ}{dr} + \frac{M_1}{D} + \frac{\nu Z}{r} \right) + \\ &+ \psi_3 \left(\frac{dM_1}{dr} - \frac{D(\nu^2 - 1)Z}{r^2} + \right. \\ &\quad \left. + \frac{M_1(1 - \nu)}{r} - Q \right) + \\ &+ \psi_4 \left(\frac{dQ}{dr} + \frac{Q}{r} + P(r) \right) \end{aligned} \quad (15)$$

and $\mu = 2\pi\mu_0$, the quantities $\psi_1 - \psi_4$ being adjoint variables.

Evidently the problem posed above belongs to the class of optimal control problems with moving boundaries. Therefore, one has to employ total variations when deriving necessary conditions of minimum of the functional (14). The total variation of a state variable y at $r = s + 0$ or at $r = s - 0$ must be calculated by the following sample

$$\Delta y(s \pm 0) = \delta y(s \pm 0) + \frac{dy(s \pm 0)}{dr} \cdot \Delta s \quad (16)$$

where Δy is the total variation and δy stands for the ordinary variation of the variable y . If the state variable is continuous at $r = s$ then, ofcourse, $\Delta y(s - 0) = \Delta y(s + 0) = \Delta y(s)$. However, in the case of discontinuous variables one has to distinguish the quantities $\Delta y(s - 0)$ and $\Delta y(s + 0)$. Note that even in the case of continuous variables the quantities $\delta y(s - 0)$ and $\delta y(s + 0)$ must not be equal to each other.

The total variation of a Lagrange' functional is calculated by the rule (see Bryson [5]),

$$\Delta \int_0^s F dr = \delta \int_0^s F dr + F|_s \cdot \Delta s \quad (17)$$

where Δs stands for an arbitrary increment of s . According to (17) one can write

$$\begin{aligned} \Delta J_* &= \mu \Delta s + \delta \int_0^s F_* dr + \delta \int_s^R F_* dr + \\ &+ F_*|_{s-} \Delta s - F_*|_{s+} \Delta s. \end{aligned} \quad (18)$$

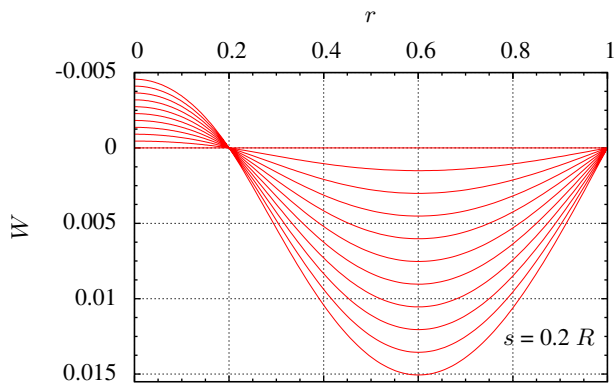


Figure 2: Transverse deflections.

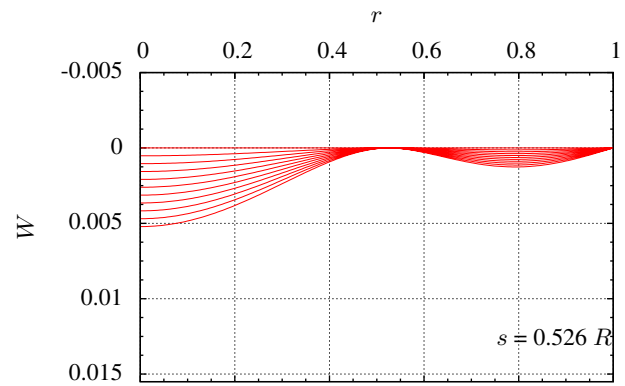


Figure 3: Transverse deflections.

Taking (15) into account one can easily determine the following weak variation

$$\begin{aligned} \delta \int_a^b F_* dr &= \int_a^b \{ kW^{k-1} r \delta W - \frac{d\psi_1}{dr} \delta W - \\ &- \psi_1 \delta Z - \frac{d\psi_2}{dr} \delta Z + \frac{\psi_2}{D} \delta M_1 + \frac{\nu \psi_2}{r} \delta Z - \\ &- \frac{d\psi_3}{dr} \delta M_1 - \frac{D(\nu^2 - 1)\psi_3}{r^2} \delta Z + \\ &+ \frac{\psi_3(1 - \nu)}{r} \delta M_1 - \psi_3 \delta Q - \frac{d\psi_4}{dr} \delta Q + \\ &+ \frac{\psi_4}{r} \delta Q \} dr + (\psi_1 \delta W + \psi_2 \delta Z + \\ &+ \psi_3 \delta M_1 + \psi_4 \delta Q) \Big|_a^b \end{aligned} \quad (19)$$

where a and b are arbitrary boundaries of integration. Substituting the both integrals in (18) by (19) with appropriate choice of boundaries a and b leads to the relation

$$\begin{aligned} \Delta J_* &= \mu \Delta s + \int_0^R \{ kW^{k-1} r \delta W - \\ &- \frac{d\psi_1}{dr} \delta W - \psi_1 \delta Z - \frac{d\psi_2}{dr} \delta Z + \frac{\psi_2}{D} \delta M_1 + \\ &+ \frac{\nu \psi_2}{r} \delta Z - \frac{d\psi_3}{dr} \delta M_1 - \frac{D(\nu^2 - 1)\psi_3}{r^2} \delta Z + \\ &+ \frac{\psi_3(1 - \nu)}{r} \delta M_1 - \psi_3 \delta Q - \frac{d\psi_4}{dr} \delta Q + \\ &+ \frac{\psi_4}{r} \delta Q \} dr + (\psi_1 \delta W + \psi_2 \delta Z + \psi_3 \delta M_1 + \\ &+ \psi_4 \delta Q) \Big|_0^s + (\psi_1 \delta W + \psi_2 \delta Z + \\ &+ \psi_3 \delta M_1 + \psi_4 \delta Q) \Big|_s^R \end{aligned} \quad (20)$$

where the matter that $F_*(s) = 0$ has taken into account.

Making use of (20) one easily obtains from the equation $\Delta J_* = 0$ the system of adjoint equations

$$\begin{aligned} \frac{d\psi_1}{dr} &= r kW^{k-1}, \\ \frac{d\psi_2}{dr} &= -\psi_1 + \frac{\nu \psi_2}{r} - \frac{D(\nu^2 - 1)\psi_3}{r^2}, \\ \frac{d\psi_3}{dr} &= \frac{\psi_2}{D} + \frac{\psi_3(1 - \nu)}{r}, \\ \frac{d\psi_4}{dr} &= -\psi_3 + \frac{\psi_4}{r}. \end{aligned} \quad (21)$$

Note that although the adjoint set (21) holds good for each $r \in [0, r]$ it must be integrated separately in regions $(0, s)$ and (s, R) , respectively. The reason is that some of adjoint variables can be discontinuous at $r = s$.

Boundary conditions (11), (12) admit to present the transversality conditions as

$$\psi_1(0) = 0, \quad \psi_3(0) = 0 \quad (22)$$

and

$$\psi_2(R) = 0, \quad \psi_4(R) = 0. \quad (23)$$

Substituting (21) – (23) in (20) admits to rewrite the equation $\Delta J_* = 0$ as

$$\begin{aligned} \mu \Delta s - (\psi_1 \delta W + \psi_2 \delta Z + \\ + \psi_3 \delta M_1 + \psi_4 \delta Q) \Big|_{s-0}^{s+0} = 0. \end{aligned} \quad (24)$$

From the physical considerations it is evident that W , Z and M_1 are continuous at $r = s$. Thus follow-

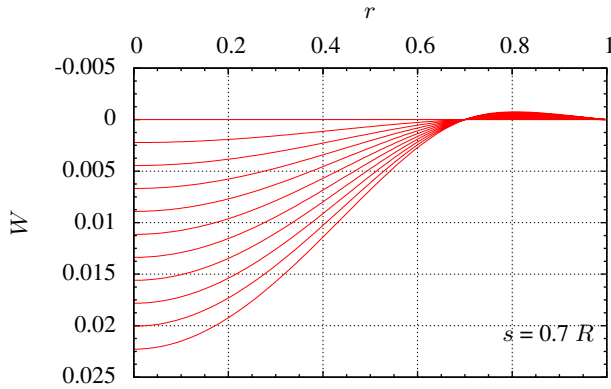


Figure 4: Transverse deflections.

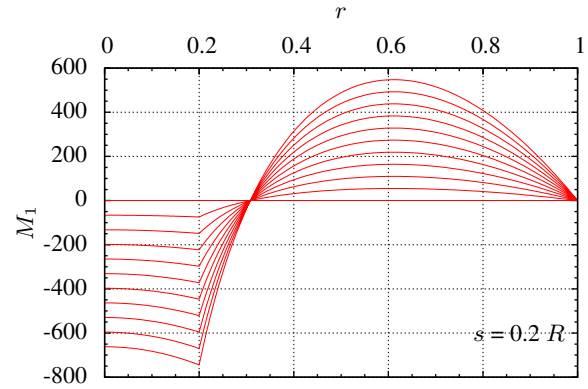


Figure 5: Radial bending moments.

ing (16) one can write

$$\begin{aligned} \delta W(s \pm 0) &= \Delta W(s) - \frac{dW}{dr}(s) \cdot \Delta s, \\ \delta Z(s \pm 0) &= \Delta Z(s) - \frac{dZ}{dr}(s) \cdot \Delta s, \\ \delta M_1(s \pm 0) &= \Delta M_1(s) - \\ &\quad - \frac{dM_1(s \pm 0)}{dr} \cdot \Delta s, \\ \delta Q(s \pm 0) &= \Delta Q(s \pm 0) - \\ &\quad - \frac{dQ(s \pm 0)}{dr} \cdot \Delta s. \end{aligned} \tag{25}$$

Substituting the weak variations of state variables from (25) to (24) and taking into account that $\Delta W(s) = 0$ and $\Delta Z(s), \Delta M_1(s), \Delta Q(s \pm 0)$ are independent leads to the requirements

$$\begin{aligned} \psi_2(s - 0) - \psi_2(s + 0) &= 0, \\ \psi_3(s - 0) - \psi_3(s + 0) &= 0 \end{aligned} \tag{26}$$

and

$$\psi_4(s - 0) = \psi_4(s + 0) = 0. \tag{27}$$

It was assumed above that Z and M_1 are continuous everywhere; thus in particular at $r = s$. Bearing in mind the continuity of M_1 it infers from (7) and (8) that $\kappa_1 = -\frac{dZ}{dr}$ is also continuous at $r = s$.

Substituting (25) – (27) in (24) and taking into account the continuity of Z, κ_1, κ_2 and ψ_2, ψ_3 , also the arbitrariness of the increment Δs one can present (24) as

$$\mu + [\psi_1(s)] \frac{dW(s)}{dr} + \psi_3(s) \left[\frac{dM_1(s)}{dr} \right] = 0. \tag{28}$$

In (28) the quadratic brackets denote the finite jumps of corresponding variables at $r = s$, e. g.

$$[y(s)] = y(s + 0) - y(s - 0)$$

where $y(s \pm 0)$ stands for right and left hand limits of the discontinuous variable $y(r)$ at $r = s$.

6 Solution of governing equations

In order to solve the problem up to the end one has to integrate the system of equations (10). Let us study the state equations (10) in greater detail in the case when the plate thickness h is constant. In this case it follows from (9) that $D = const$, as well. Integrating the last equation in the system (10) one obtains

$$Q = -\frac{1}{r} \left(\int P(r) dr + C_{\pm} \right) \tag{29}$$

where C_+ and C_- stand for constants of integration in the regions $[0, s]$ and $[s, R]$, respectively.

For the subsequent integration of (10) it is reasonable to substitute Q and M_1 making use of (29) and (7), (8) in (10). This results in a fourth order equation with respect to the deflection W known from the theory of elastic plates (see Reddy [25], Vinson [30]; Ventsel, Krauthammer [29]). The general solution of this equation can be presented in the case $P = const$ as

$$\begin{aligned} W &= \frac{Pr^4}{64D} + A_{1j}r^2 \ln r + A_{2j}r^2 + \\ &\quad + A_{3j} \ln r + A_{4j} \end{aligned} \tag{30}$$

for $r \in [r_j, r_{j+1}]$ and $j = 0, 1$. Here the following notation is used: $r_0 = 0, r_1 = s$ and $r_2 = R$. Evidently,

$$Z = \frac{Pr^3}{16D} + A_{1j}r(2 \ln r + 1) + 2A_{2j}r + \frac{A_{3j}}{r} \tag{31}$$

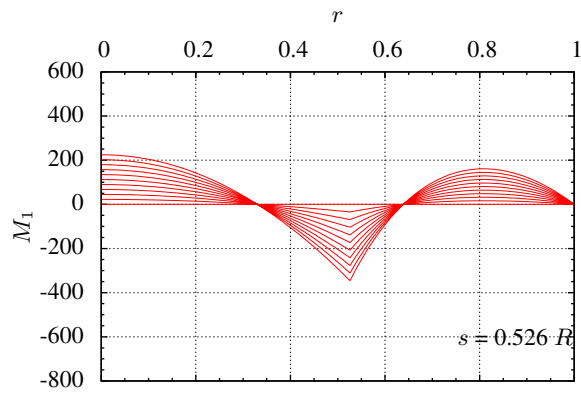


Figure 6: Radial bending moments.

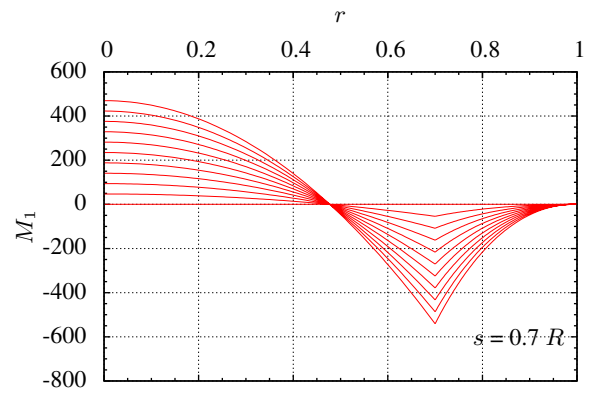


Figure 7: Radial bending moments.

and

$$\begin{aligned}
 M_1 &= -\frac{Pr^2(3 + \nu)}{16} - \\
 &-A_{1j}D[3 + \nu + 2(1 + \nu) \ln r] - \\
 &-2DA_{2j}(1 + \nu) - \frac{D(\nu - 1)}{r^2}A_{3j}, \\
 M_2 &= -\frac{Pr^2(1 + 3\nu)}{16} - \\
 &-A_{1j}D[1 + 3\nu + 2(1 + \nu) \ln r] - \\
 &-2DA_{2j}(1 + \nu) - \frac{D(\nu - 1)}{r^2}A_{3j}.
 \end{aligned} \tag{32}$$

The integration constants $A_{1j} - A_{4j}$ will be determined from the boundary and continuity conditions. Let us consider first the solution in the internal region for $r \in [0, s]$. Here $j = 0$ in (30) – (32). Since at the center of the plate the quantities $W(0)$, $M_1(0)$, $M_2(0)$ must be finite whereas according to (12) $Z(0) = 0$ one has

$$A_{10} = 0, \quad A_{30} = 0. \tag{33}$$

continuity requirements for Z and M_1 result in

$$\begin{aligned}
 A_{20}s^2 + A_{40} + \frac{Ps^4}{64D} &= 0, \\
 A_{11}s^2 \ln s + A_{21}s^2 + A_{31} \ln s + \\
 + A_{41} + \frac{Ps^4}{64D} &= 0, \\
 -2sA_{20} + A_{11}s(1 + 2 \ln s) + \\
 + 2A_{21}s - \frac{A_{31}}{s} &= 0, \\
 -2A_{20} + A_{11}(3 + 2 \ln s) + \\
 + 2A_{21} - \frac{A_{31}}{s^2} &= 0, \\
 A_{11}R^2 \ln R + A_{21}R^2 + A_{31} \ln R + \\
 + A_{41} + \frac{PR^4}{64D} &= 0, \\
 A_{11}[2(1 + \nu) \ln R + 3 + \nu] + \\
 + 2(1 + \nu)A_{21} - \frac{A_{31}(1 - \nu)}{R^2} + \\
 + \frac{PR^2(3 + \nu)}{16D} &= 0.
 \end{aligned} \tag{34}$$

The system (34) can be easily solved with respect to unknowns A_{20} , A_{40} , A_{11} , A_{21} , A_{31} , A_{41} and pre-

sented as

$$A_{20} = \frac{p}{K} \cdot [R^6 [2(\nu + 5)(\ln s - \ln R) + 3\nu + 13] + s^2 R^4 [4(\nu + 3) \cdot (\ln s - \ln R) - 3\nu - 13] + s^4 R^2 [2(\nu + 1)(\ln s - \ln R) + \nu - 1] + s^6(1 - \nu)],$$

$$A_{40} = \frac{-ps^2 R^2}{K} \cdot [R^4 [2(\nu + 5) \cdot (\ln s - \ln R) + 3\nu + 13] + 4s^2 R^2 [(\nu + 3)(\ln s - \ln R) - \nu - 4] + s^4 [-2(\nu + 1) \cdot (\ln s - \ln R) + \nu + 3]],$$

$$A_{11} = \frac{2pR^2}{K} \cdot [(\nu + 5)R^4 - 2(\nu + 3)s^2 R^2 + (\nu + 1)s^4], \tag{35}$$

$$A_{21} = \frac{-p}{K} [R^6 [2(\nu + 5) \ln R - \nu - 3] + s^2 R^4 [4(\nu + 3)(\ln R - 2 \ln s) - \nu + 1] + s^4 R^2 [2(\nu + 1) \ln R + \nu + 3] + s^6(\nu - 1)],$$

$$A_{31} = s^2 \cdot A_{11},$$

$$A_{41} = \frac{-ps^2 R^2}{K} [R^4 [2(\nu + 5) \cdot (2 \ln s - \ln R) + \nu + 3] - 4s^2 R^2 [(\nu + 3) \ln R + 1] + s^4 [2(\nu + 1) \ln R - \nu + 1]],$$

where

$$K = 64D [(\nu - 1)s^4 - (\nu + 3)R^4 + 4s^2 R^2 [(\nu + 1)(\ln R - \ln s) + 1]].$$

7 Solution of the adjoint system

The adjoint system (21) can be integrated after the substitution of (30) in (21). For the sake of simplicity let us consider the case when $k = 1$ in greater detail.

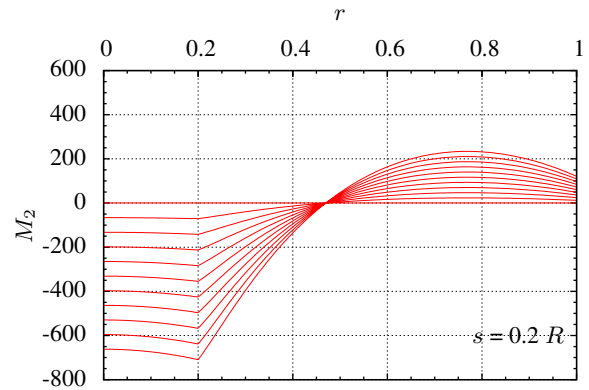


Figure 8: Hoop moments.

It is easy to recheck that the general solution of (21) corresponding to the case $k = 1$ can be presented as

$$\begin{aligned} \psi_1 &= \frac{r^2}{2} + C_{1j}, \\ \psi_2 &= C_{2j} + \frac{C_{3j}}{r} - \frac{(3 + \nu)r^3}{16} - \frac{C_{1j}(1 + \nu)r \ln r}{2}, \\ \psi_3 &= \frac{C_{2j}r^2}{D(\nu + 1)} + \frac{C_{3j}}{D(\nu - 1)} - \frac{r^4}{16D} - \frac{C_{1j}r^2}{D(\nu^2 - 1)} + \frac{C_{1j}r^2[(1 - \nu) \ln r + 1]}{2D(\nu - 1)}, \\ \psi_4 &= -\frac{C_{2j}r^3}{2D(\nu + 1)} - \frac{C_{3j}r \ln r}{D(\nu - 1)} + C_{4j}r + \frac{r^5}{64D} + \frac{C_{1j}r^3 \ln r}{4D} + \frac{C_{1j}(3 - 2\nu - \nu^2)r^3}{8D(\nu^2 - 1)} \end{aligned} \tag{36}$$

for $r \in [r_j, r_{j+1}]$ where $j = 0, 1$.

For determination of 8 unknown constants $C_{1j}, C_{2j}, C_{3j}, C_{4j}$ where $j = 0, 1$ one has 8 boundary and intermediate conditions presented by (22), (23), (26) and (27).

It immediately follows from boundary conditions (22) that

$$C_{10} = 0, \quad C_{30} = 0. \tag{37}$$

The boundary and intermediate conditions (23),

(26), (27) lead to the linear algebraic system

$$\begin{aligned}
 & C_{21}R + \frac{C_{31}}{R} - \frac{C_{11}(1-\nu)R \ln R}{2} - \\
 & - \frac{(3-\nu)R^3}{16} = 0, \\
 & - \frac{C_{21}R^3(\nu-1)}{2} - C_{31}(\nu+1)R \ln R + \\
 & + C_{41}(\nu^2-1)RD + \frac{R^5(\nu^2-1)}{64} + \\
 & + \frac{C_{11}(\nu^2-1)R^3 \ln R}{4} + \\
 & + \frac{C_{11}(3-2\nu-\nu^2)R^3}{8} = 0, \\
 & - \frac{C_{21}s^3(\nu-1)}{2} - C_{31}(\nu+1)s \ln s + \\
 & + C_{41}(\nu^2-1)sD + \frac{s^5(\nu^2-1)}{64} + \\
 & + \frac{C_{11}(\nu^2-1)s^3 \ln s}{4} + \\
 & + \frac{C_{11}(3-2\nu-\nu^2)s^3}{8} = 0, \\
 & - \frac{C_{20}s^3(\nu-1)}{2} + C_{40}s(\nu^2-1)D + \\
 & + \frac{s^5(\nu^2-1)}{64} = 0, \\
 & (C_{21} - C_{20})s + \frac{C_{31}}{s} - \\
 & - \frac{C_{11}(1+\nu)s \ln s}{2} = 0, \\
 & (C_{21} - C_{20})(\nu-1)s^2 + \\
 & + C_{31}(\nu+1) - C_{11}s^2 + \\
 & + \frac{C_{11}s^2(\nu+1)[(1-\nu) \ln s + 1]}{2} = 0.
 \end{aligned} \tag{38}$$

From (38) one can easily determine the unknown constants C_{20} , C_{40} , C_{11} , C_{21} , C_{31} , C_{41} and present these

as

$$\begin{aligned}
 C_{20} &= \frac{(3+\nu)R^2}{16} + \frac{R^2(R^2-s^2)}{8L} \cdot \\
 & \cdot [2R^2(3+\nu) - (1+\nu)(R^2+s^2)] \cdot \\
 & \cdot \left[\frac{(\nu-1)(s^2-R^2)}{4R^2} + (1+\nu) \ln \frac{R}{s} \right], \\
 C_{40} &= \frac{2s^2(3+\nu)R^2 - (\nu+1)s^4}{64D(\nu+1)} + \\
 & + \frac{s^2R^2(R^2-s^2)}{16DL(\nu+1)} \cdot \\
 & \cdot [2R^2(3+\nu) - (1+\nu)(R^2+s^2)] \cdot \\
 & \cdot \left[\frac{(\nu-1)(s^2-R^2)}{4R^2} + (1+\nu) \ln \frac{R}{s} \right], \\
 C_{11} &= \frac{R^2(R^2-s^2)}{8L} \cdot \\
 & \cdot [2R^2(3+\nu) - (\nu+1)(R^2+s^2)], \\
 C_{21} &= \frac{(3+\nu)R^2}{16} + \frac{R^2(R^2-s^2)}{8L} \cdot \\
 & \cdot [2R^2(3+\nu) - (1+\nu)(R^2+s^2)] \cdot \\
 & \cdot \left[\frac{(\nu-1)s^2}{4R^2} + \frac{1}{2}(1+\nu) \ln R \right], \\
 C_{31} &= \frac{R^2s^2(1-\nu)(R^2-s^2)}{32L} \cdot \\
 & \cdot [2R^2(3+\nu) - (1+\nu)(R^2+s^2)], \\
 C_{41} &= \frac{s^2[2(3+\nu)R^2 - (\nu+1)s^2]}{64D(\nu+1)} + \\
 & + \frac{s^2R^2(R^2-s^2)}{32DL} \cdot \\
 & \cdot [2R^2(3+\nu) - (1+\nu)(R^2+s^2)] \cdot \\
 & \cdot \left[-2 \ln s + \frac{(\nu-1)s^2}{2R^2D(\nu+1)} + \right. \\
 & \left. + \frac{2(\nu+1)R^2 \ln R + (\nu+3)R^2}{2R^2D(\nu+1)} \right]
 \end{aligned} \tag{39}$$

where for the conciness sake the notation

$$\begin{aligned}
 L &= s^2(\nu-1)(s^2-R^2) + \\
 & + 2R^2(\nu+1)(s^2-R^2) \ln R - \\
 & - 2R^2s^2(\nu+1)(\ln s - \ln R) + \\
 & + 2R^2(\nu+1)(R^2 \ln R - s^2 \ln s) - \\
 & - R^2(\nu+3)(R^2-s^2)
 \end{aligned}$$

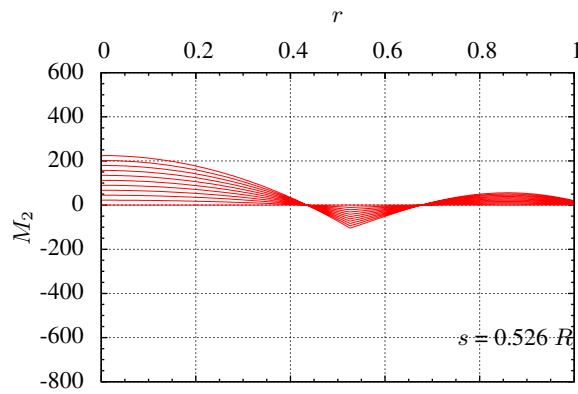


Figure 9: Circumferential bending moments.

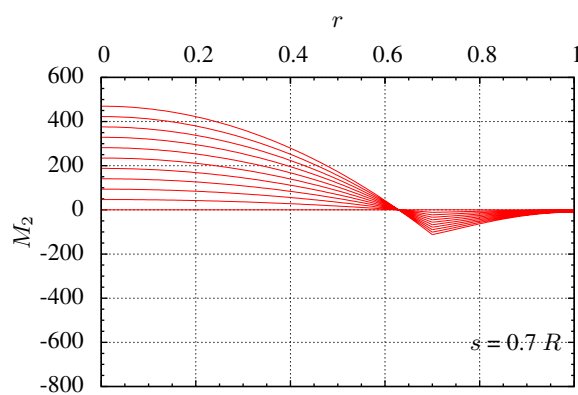


Figure 10: Hoop moments.

is introduced.

8 Discussion of results

Results of calculations are presented in Fig. 2 – 10 and Table 1. The calculations are implemented for $k = 1$ and $\mu = 0$ in (3), (21), (28).

In Fig. 2 – 4 the distributions of deflections of the plate are presented for various values of the transverse load intensity. Fig. 2 and Fig. 4 correspond to the positions of the support at $s = 0.2R$ and $s = 0.7R$ whereas Fig. 3 is associated with the optimal location of the intermediate support. The optimal solution corresponds to $s = 0.526R$. It can be seen from Fig. 2 that in the case of smaller values of the radius of the intermediate support deflections at the central part of the plate for $r < 0.2R$ are directed upward despite the pressure is directed downward. Similarly in the case when $s = 0.7R$ one can see negative deflections in the outward region for $r > 0.7R$ (Fig. 4). However, in the case of optimal position of the additional support the deflections are non-negative everywhere

Table 1: Efficiency of the design.

s/R	0.2	0.4	0.526	0.6	0.8
$10^{-4} J_0/R^6$	1.996	1.055	1.027	1.031	1.849
$10^2 e_1$	1.562	0.826	0.803	0.807	1.447
$10^2 e_2$	43.80	23.15	22.54	22.62	40.58

(Fig. 3). It is somewhat surprising that the maximal deflections in the central and outward regions of the plate, respectively, are quite different in the optimal case. However, one has to take into account that the cost function (3) with $\mu_0 = 0, k = 1$ corresponds to the volume of the axisymmetric body.

In Fig. 5 – 7 bending moments M_1 are presented for the cases when $s = 0.2R, s = 0.7R$ and for the optimal case. It can be seen from Fig. 5 – 7 that the slope of the radial bending moment has finite jumps at the support position, as might be expected. It is somewhat surprising that the radial bending moment vanishes at an internal point for any values of the transverse pressure loading. It reveals from Fig. 5 that in the case of smaller values of the radius of the internal support the radial bending moment remains negative in the central part of the plate. It is negative in the vicinity of the support in the optimal case, as well.

Distributions of the circumferential bending moment M_2 are presented in Fig. 8 – 10 for different values of the pressure loading. Figures 8 and 10 correspond to the cases when $s = 0.2R$ and $s = 0.7R$, respectively. Fig. 9 reflects the distribution of the bending moment M_2 in the case of optimal location of the additional support. It reveals from Fig. 8 that the bending moment M_2 is unexpectedly continuous at $r = s$.

The efficiency of the design established can be assessed by the ratios

$$e_{1,2} = \frac{J_0}{J_{1,2}}$$

where J_0 stands for the value of the cost function (3) corresponding to the optimal position of the internal support. However,

$$J_1 = \int_0^R W r dr$$

in the case of the plate without additional supports and J_2 stands for the value of J in the case when internal support is located at the center of the plate. Calculations carried out showed that the value of the cost function is very sensitive with respect to the location of the internal support (Table 1). It can be seen from

Table 1 that in the case of the optimal location of the internal support the value of J is almost five times less than that corresponding to the plate with a support at its center.

9 Concluding remarks

Variational methods of the theory of optimal control are used for solving the problem of optimal location of an additional rigid ring support in the case of a circular plate. The plate is made of an elastic material and subjected to a distributed transverse pressure. Necessary optimality conditions have derived under the assumption that the cost of the additional support is proportioned to its length. Numerical results have presented for the plate simply supported at the edge and subjected to the uniformly distributed transverse pressure.

The results of calculations showed that the optimal position of the additional support admits to diminish essentially the cost function. It revealed by calculations that the both, radial and circumferential bending moments are continuous over the entire plate.

Acknowledgements: The partial support from the Estonian Science Foundation Grant ETF 7461 Optimization of elastic and inelastic shells and from the Target-Financed Project SF 0180081908 Models of Applied mathematics and mechanics are gratefully acknowledged.

References:

- [1] B. Akesson, N. Olhoff, Minimum stiffness of optimally located supports for maximum value of beam eigenfrequencies, *J. Sound Vibr.*, 120, 1988, pp. 457–463.
- [2] N. Banichuk, *Introduction to Optimization of Structures*, Berlin, Springer, 1990.
- [3] D. Bojczuk, Z. Mroz, On optimal design of supports in beam and frame structures, *Struct. Optimiz.*, 16, 1, 1998, pp. 47–57.
- [4] D. Bojczuk, Z. Mroz, Determination of optimal actuator forces and positions in smart structures using adjoint method, *Struct. Multidiscipl. Optim.*, 30, 4, 2005, pp. 308–319.
- [5] A. Bryson, Ho Yu-Chi, *Applied Optimal Control*, New-York, Wiley, 1975.
- [6] A. Garstecki, Z. Mroz, Optimal design of supports of elastic structures subjected to loads and initial distortions, *Mech. Struct. Mach.*, 15, 1987, pp. 47–68.
- [7] D. G. Hull, *Optimal Control Theory for Applications*, Berlin, Springer, 2003.
- [8] J. Lellep, Optimal location of additional supports for plastic cylindrical shells subjected to impulsive loading, *Int. J. Non-Linear Mechanics*, 19, 4, 1984, pp. 323–330.
- [9] J. Lellep, Parametrical optimization of plastic cylindrical shells in the post-yield range, *Int. J. Eng. Sci.*, 23, 12, 1985, pp. 1289–1303.
- [10] J. Lellep, Optimum location of additional supports for a geometrically nonlinear plastic cylindrical shell, *Soviet Applied Mechanics*, 21, 1, 1985, pp. 54–60.
- [11] J. Lellep, Optimal design of plastic reinforced cylindrical shells, *Control-Theory and Advanced Technology*, 5, 2, 1989, pp. 119–135.
- [12] J. Lellep, Ü. Lepik, Analytical methods in plastic structural design, *Eng. Optimization*, 7, 3, 1984, pp. 209–239.
- [13] J. Lellep, A. Paltsepp, Optimization of inelastic cylindrical shells with internal supports, *Struct. Multidiscipl. Optim.*, 41, 6, 2010, pp. 841–852.
- [14] J. Lellep, J. Polikarpus, Optimization of elastic plastic circular plates under axisymmetric loading, *Proc. 20th Intern. Conference "Continuous Optimization and Knowledge-Based Technologies"*. Ed. L. Sakalauskas, G. W. Weber, E. K. Zavadskas, Vilnius, Technika, 2008, pp. 291–295.
- [15] J. Lellep, J. Polikarpus, Elastic plastic bending of stepped annular plates, *Applications of Mathematics & Computer Engineering*, (Ed. A. Zemliak, N. Mastorakis), *American Conf. on Applied Mathematics*, WSEAS Press, 2011, pp. 140–145.
- [16] J. Lellep, J. Polikarpus, Optimization of elastic circular plates with additional supports, *Recent Researches in Mechanics*, (Ed. N. Mastorakis, V. Mladenov et al.), *2nd Int. Conf. on Theoretical and Applied Mechanics*, WSEAS Press, 2011, pp. 136–141.
- [17] J. Lellep, E. Puman, Optimization of elastic and inelastic conical shells of piece wise constant thickness, *Recent Researches in Mechanics*, (Ed. N. Mastorakis, V. Mladenov et al.), *2nd Int. Conf. on Theoretical and Applied Mechanics*, WSEAS Press, 2011, pp. 223–228.
- [18] J. Lellep, E. Puman, L. Roots, E. Tungel, Optimization of rotationally symmetric shells, *Recent Advances in Applied Mathematics*, (Ed. C. A. Bolycea et al.) *14th WSEAS Int. Conf. Applied Mathematics*, WSEAS Press, 2009, pp. 233–238.
- [19] J. Lellep, E. Puman, L. Roots, E. Tungel, Optimization of stepped shells, *WSEAS Transactions on Mathematics*, 9, 2, 2010, pp. 130–139.

- [20] Ü. Lepik, Optimal design of beams with minimum compliance, *Int. J. Non-Linear Mechanics*, 13, 1, 1978, pp. 33–42.
- [21] Z. Mroz, T. Lekszycki, Optimal support reaction in elastic frame structures, *Comput. Struct.*, 14, 1981, pp. 179–185.
- [22] Z. Mroz, G. Rozvany, Optimal design of structures with variable support positions, *J. Optim. Theory Applic.*, 15, 1975, pp. 85–101.
- [23] N. Olhoff, B. Akesson, Minimum stiffness of optimally located supports for minimum value of column buckling loads, *J. Struct. Optim.*, 3, 1991, pp. 163–175.
- [24] W. Prager, G. I. N. Rozvany, Plastic design of beams: optimal locations of supports and steps in yield moment, *Int. J. Mech. Sci.*, 17, 10, 1975, pp. 627–631.
- [25] J. N. Reddy, *Theory and Analysis of Elastic Plates and Shells*, Boca Raton, CRC Press, 2007.
- [26] G. I. N. Rozvany, *Structural Design via Optimality Criteria*, Dordrecht, Kluwer, 1989.
- [27] D. Szelag, Z. Mroz, Optimal design of elastic beams with unspecified support positions, *ZAMM*, 58, 1978, pp. 501–510.
- [28] G. J. Turvey, M. Salehi, Elastic large deflection analysis of stiffened annular sector plates, *Int. J. Mech. Sci.*, 40, 1, 1998, pp. 51–70.
- [29] E. Ventsel, T. Krauthammer, *Thin Plates and Shells: Theory, Analysis and Applications*, New-York, Marcel Dekker, 2001.
- [30] J. Vinson, *Plate and Panel Structures of Isotropic, Composite and Piezoelectric Materials, Including Sandwich Construction*, Dordrecht, Springer, 2005.
- [31] D. Wang, Optimization of support positions to minimize the maximal deflections of structures, *Int. J. Solids Structures*, 41, 26, 2004, pp. 7445–7458.
- [32] C. M. Wang, Y. Xiang, S. Kitipornchai, K. M. Liew, Axisymmetric buckling of circular Mindlin plates with ring supports, *J. Struct. Eng.*, 119, 3, 1993, pp. 782–793.